


Specifications

Current rating:3.0A AC/DC
Voltage rating:250V AC/DC
Contact resistance:20m ohm. max.
Insulation resistance:1000M ohm. Min.
Withstanding voltage:1000V AC for one minute
Operating temperature range:-25°C to +105°C

Material and Finish

Insulator:High Temp. Plastic(UL94V-0)
Contact:Copper Alloy
Plating:Tin Plated

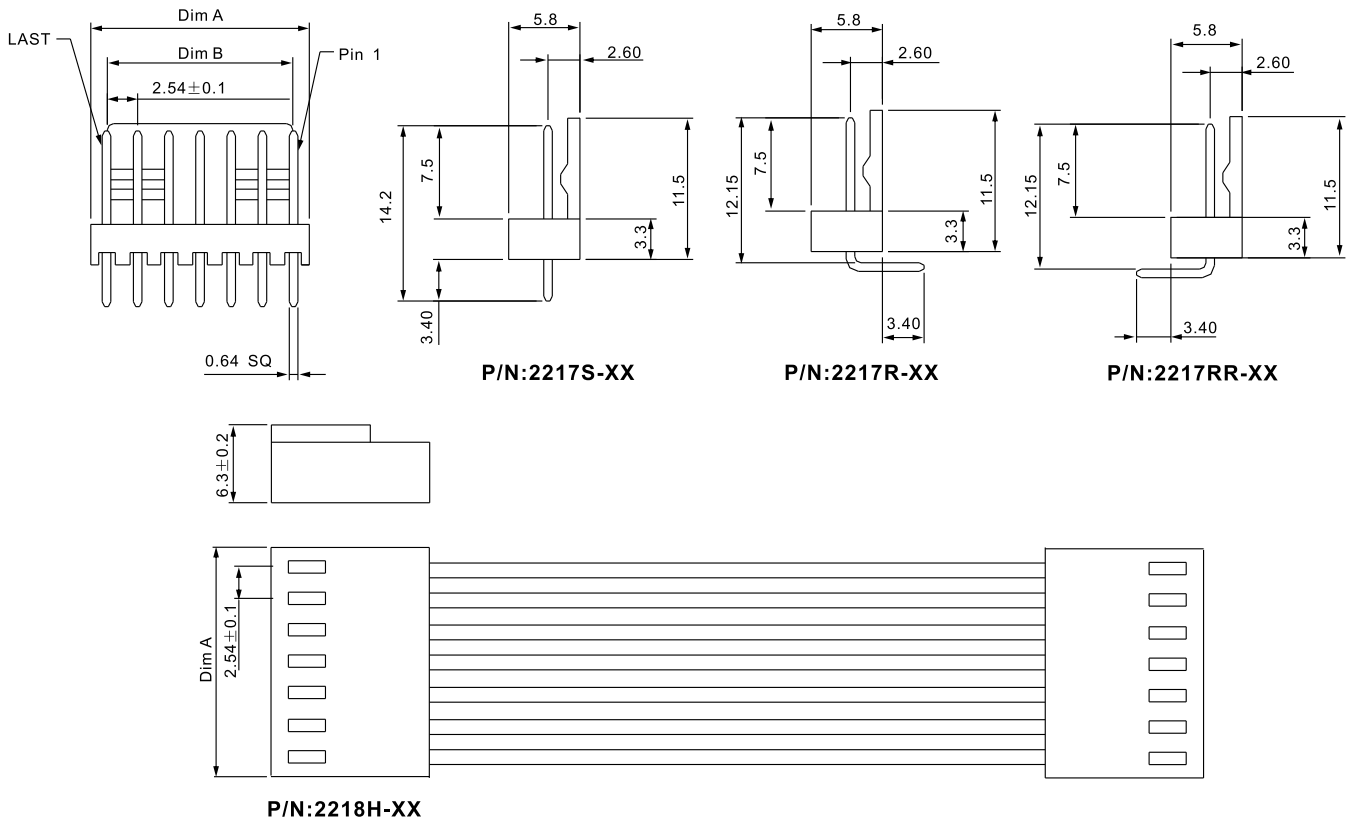

Engineering Dimension


P/N:2217 Series

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	5.08	2.54	12	30.48	27.94
3	7.62	5.08	13	33.02	30.48
4	10.16	7.62	14	35.56	33.02
5	12.70	10.16	15	38.10	35.56
6	15.24	12.70	16	40.64	38.10
7	17.78	15.24	17	43.18	40.64
8	20.32	17.78	18	45.72	43.18
9	22.86	20.32	19	48.26	45.72
10	25.40	22.86	20	50.80	48.26
11	27.94	25.40			

P/N:2218 Series

Circuits	Dim. A	Circuits	Dim. A
1	3.10	11	28.50
2	5.60	12	31.00
3	8.10	13	33.50
4	10.70	14	36.10
5	13.20	15	38.60
6	15.80	16	41.10
7	18.30	17	43.60
8	20.90	18	46.10
9	23.40	19	48.60
10	25.90	20	51.10

Recommended PCB Layout

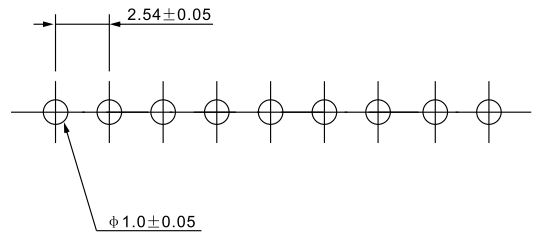

Ordering Information

2217S-XX

① ②

2218H-XX

① ②

① S: Straight Type R: R/A Type RR: R/A Reverse Type	② No. Of Contacts
---	-------------------

① H: Housing	② No. Of Contacts
--------------	-------------------

Unit:mm