



# 2 ZONE COMPACT ALARM CONTROLLERS

## AC-339, AC-239 & AC-238

**THE MOST POWERFUL SMALL ALARM SYSTEMS  
WE CAN DO MORE THAN YOU EXPECT**


- Protect Shops, Offices, Residences, Mobile Homes & Boats
- Alarm, Door Chime & Visitor Announcer in One System
- DIY Systems Work Independently and Expendable
- What Else ? We Are Low Cost & Everybody Affordable !

### INTRODUCTION

This is a series of economic and versatile alarm controllers designed for protecting shops, offices, residences, mobile homes and boats. Each controller comes with two basic protection zones, siren driver and relay output contact for the owner to set up an effective protection system in minimum costs. AC-339 and AC-239 also come with built-in door chime and siren. AC-339 is arm-disarm controlled by infrared remote control key and that the AC-239 and AC-238 are ON-OFF controlled by switch. The AC-238 is a simplified version which has most of the features of the AC-239 except the door chime and the remote key arm-disarm control facility.

The controllers consume very low standby power. They are ideal for use as an integral part of a battery operated security system. The controllers conform to CE-EMC standards.

## AC-339 IR REMOTE CONTROLLED 2 ZONE ALARM CONTROLLER WITH DOOR CHIME

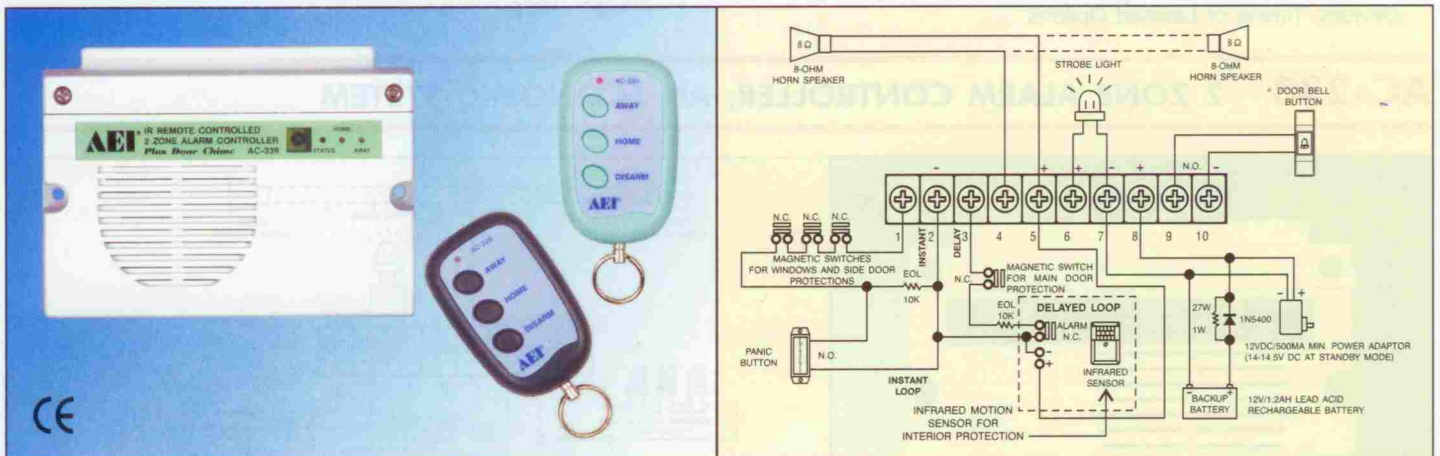

### FEATURES AND SPECIFICATIONS

- \* Infrared Remote Arm-Disarm Controlled with 6,561 Code Address, 8 Metres Control Distance
- \* Two Independent Protection Zones, Instant and Delay
- \* Infrared Remote 24 Hour Panic Button
- \* Protection Zones are End-Of-Line Resistor Supervision Compatible with Both N.C. and N.O. Sensors
- \* Home or Away Operation Options
- \* Built-in Door Chime and Siren
- \* Built-in 60 Second Exit Delay, 30 Second Entry Delay and 3 Minute Siren Timers
- \* Siren Output Drives Two External 8 Ohm Siren Horns
- \* 12V DC Output Relay Contact Drives Other Peripheral Alarm Device, Timing or Latched Options
- \* 3 LED Indicate HOME, AWAY, and Operation STATUS of Exit, Armed, Zone Fault and Alarm Memory
- \* Facility for Connecting Door Chime Buttons
- \* 12-16V DC Operation, 8mA Low Standby Current
- \* 6V Operation IR Control Key (4 "LR44" button batteries or eq.)
- \* Each Controller with\* 2 IR Control Keys
- \* Dimensions: Controller- - 87(H) x 120(W) x 33(D) mm  
IR Key - - - 56(H) x 36(W) x 15.4(D) mm
- \* Weight: Controller- - 180g  
IR Key - - - 20g

WE PROVIDE THE **Best** FOR YOUR SELECTION