

PATTERSON

TACT SWITCH

TS型 觸動開關


TYPE TS

FEATURES 特徵

- Type TS in size (12x12 mm) and Weight (approx 1.5g) TS.type 的尺寸 (12×12公厘) 和重量(大約1.5克)
- Compact and precision operation 體積度小
- Ideal for applications in keyboard, sensor, household equipments, etc. 適用於鍵盤、感應器、家電等裝置
- Permit to directly Solder on P.C. Board 可直接接合在P.C.板上。

CHARACTERISTICS 特性

CONTACT RATING 額定電流	25mA 50VAC/VDC
MECHANICAL LIFE 機械壽命	100,000 actuation.
CONTACT RESISTANCE 接觸電阻	20m Ω max. (initial)
INSULATION RESISTANCE 絕緣電阻	100m Ω min.
DIELECTRIC STRENGTH 耐電壓	1,000V RMS min.
OPERATING TEMPERATURE 操作溫度	-30°C to 65°C

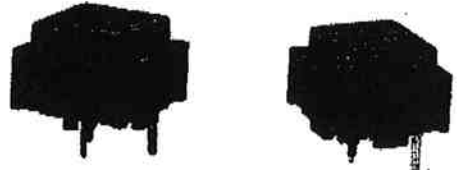

NOTE:
Specifications and Material listed above are general specifications for switches with standard options.
注意：所列為一般規格和材料。

MATERIALS 材質



- CASE: PBT 外殼：PBT
- ACTUATOR: ABS, 7 colors available (red, orange, yellow, green, blue, black, white) 上蓋：ABS, 有7種顏色可供選擇(紅、橙、黃、綠、藍、黑、白)
- MOVABLE CONTACT: beryllium copper, silver plated 可動接點：鉍銅鍍銀
- STATIONARY CONTACTS & TERMINALS: Cu, Silver Plated 靜接點及端子：黃銅鍍銀

CONTACT CONFIGURATION 接點構成



DIMENSIONS 外觀尺寸

● TS-1 (PB-04)

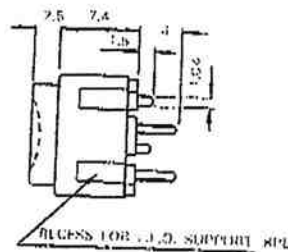

P.C. MOUNTING 安裝孔

