




MV-4011KT VIDEO AMPLIFIER

FOR LONG CABLE RUN COMPENSATION

Before operating this product, please read these instructions completely.

Video Input: 1.0 Vp-p/75ohm, 1Ch. Inputs(BNC)
 Video output: 0.4Vp-p to 2.0Vp-p/75ohm, 1Ch(BNC)
 Max. Video Gain: 12dB +/- 0.3dB
 Gain High Frequency: 10Hz to 4.5MHz +/- 0.3dB
 Frequency Band Width: 4.5MHz
 Power Consumption: 3W(Max)
 Operating Temperature: -5 ~ 50

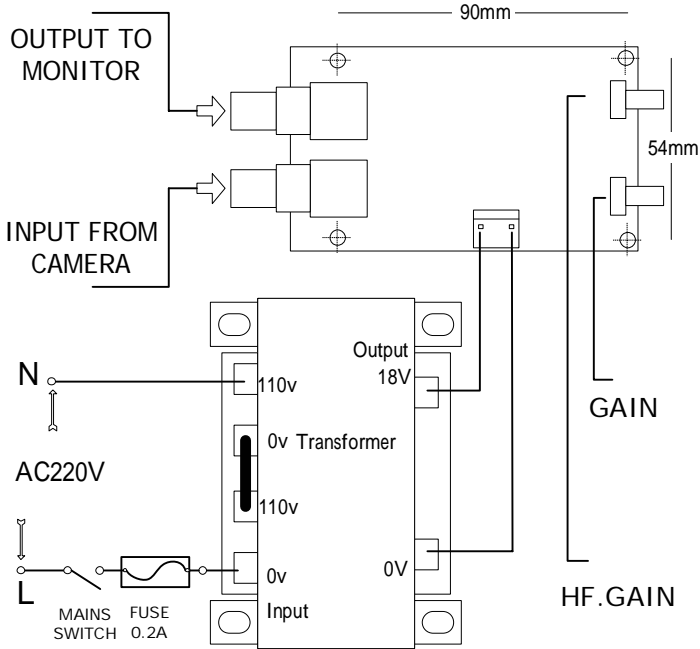

TRANSFORMER: 6VA 18V




MV-4011KT VIDEO AMPLIFIER

FOR LONG CABLE RUN COMPENSATION

Before operating this product, please read these instructions completely.

Video Input: 1.0 Vp-p/75ohm, 1Ch. Inputs(BNC)
 Video output: 0.4Vp-p to 2.0Vp-p/75ohm, 1Ch(BNC)
 Max. Video Gain: 12dB +/- 0.3dB
 Gain High Frequency: 10Hz to 4.5MHz +/- 0.3dB
 Frequency Band Width: 4.5MHz
 Power Consumption: 3W(Max)
 Operating Temperature: -5 ~ 50

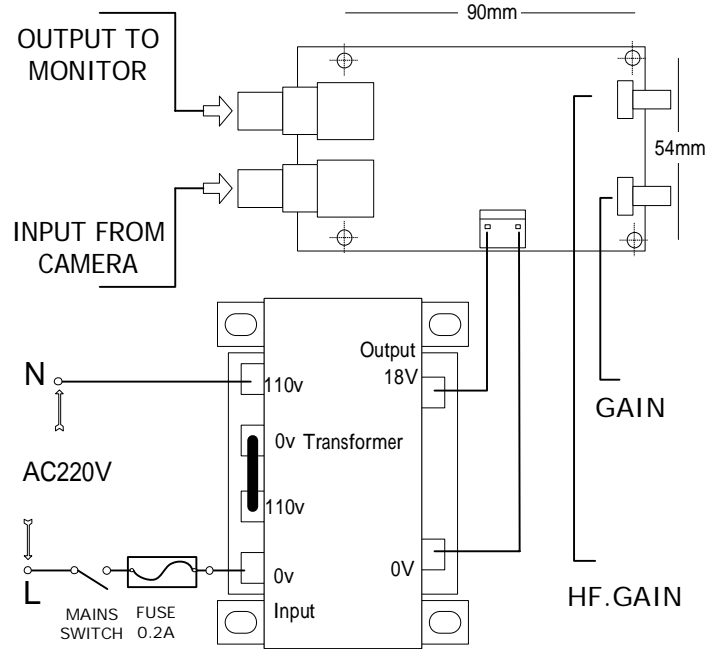

TRANSFORMER: 6VA 18V




MV-4011KT VIDEO AMPLIFIER

FOR LONG CABLE RUN COMPENSATION

Before operating this product, please read these instructions completely.

Video Input: 1.0 Vp-p/75ohm, 1Ch. Inputs(BNC)
 Video output: 0.4Vp-p to 2.0Vp-p/75ohm, 1Ch(BNC)
 Max. Video Gain: 12dB +/- 0.3dB
 Gain High Frequency: 10Hz to 4.5MHz +/- 0.3dB
 Frequency Band Width: 4.5MHz
 Power Consumption: 3W(Max)
 Operating Temperature: -5 ~ 50

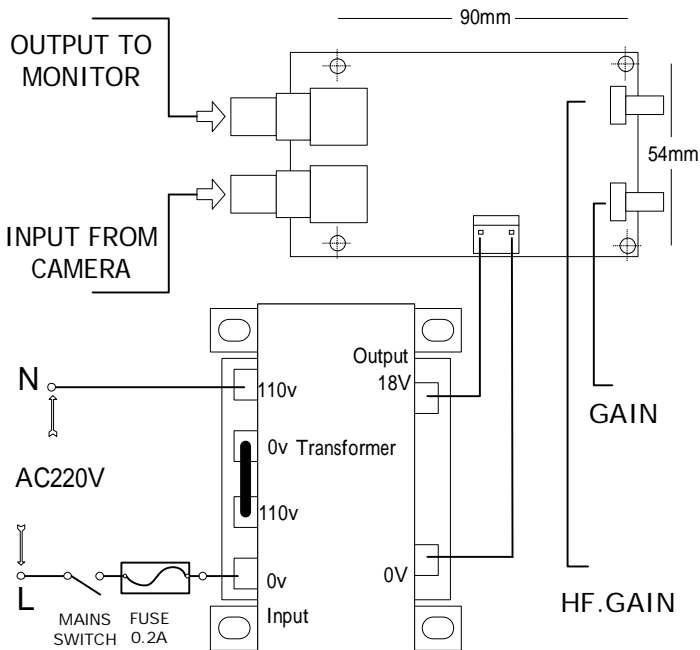

TRANSFORMER: 6VA 18V




MV-4011KT VIDEO AMPLIFIER

FOR LONG CABLE RUN COMPENSATION

Before operating this product, please read these instructions completely.

Video Input: 1.0 Vp-p/75ohm, 1Ch. Inputs(BNC)
 Video output: 0.4Vp-p to 2.0Vp-p/75ohm, 1Ch(BNC)
 Max. Video Gain: 12dB +/- 0.3dB
 Gain High Frequency: 10Hz to 4.5MHz +/- 0.3dB
 Frequency Band Width: 4.5MHz
 Power Consumption: 3W(Max)
 Operating Temperature: -5 ~ 50

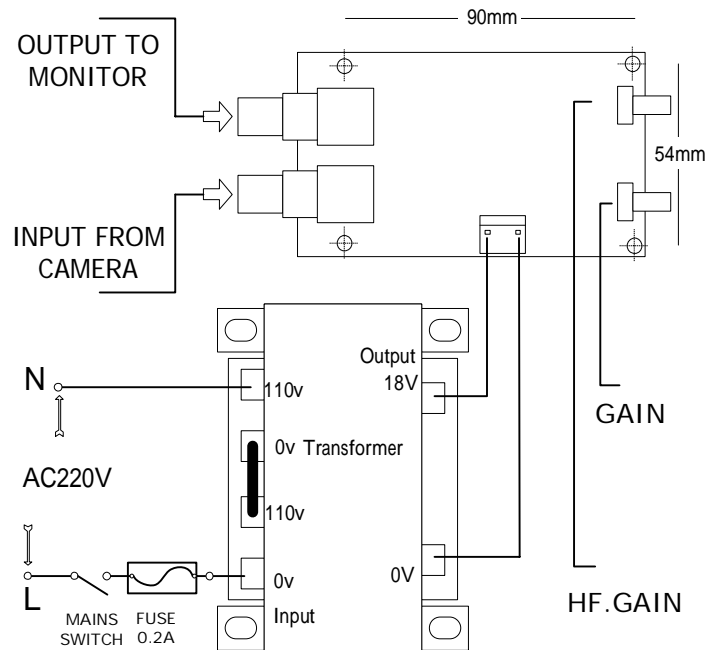

TRANSFORMER: 6VA 18V