




## Neutrik- Rean RT3FC-B




<b>Product</b>	
Gender	Female
<b>Electrical</b>	
Contact Resistance	< 5 mΩ
Dielectric Strength	> 0.5 kVdc
Insulation Resistance	> 1 GΩ
Rated Current per Contact	< 5 A
<b>Mechanical</b>	
Cable O.D.	2.0 - 4.5 mm
Lifetime	> 1000 Mating Cycles
Wiring	Solder Contacts
<b>Material</b>	
Bushing	ABS
Contact Plating	Au
Contacts	Bronze
Insert	PA 6.6 30 % GF
Shell	Zinc Diecast
Shell Plating	Black
Strain Relief	PA6
<b>Environmental</b>	
Solderability	Complies with IEC 68-2-20
Temperature Range	-30 °C to +80 °C

### Features:


3-pole TINY cable connector (Mini XLR), black metal shell, gold plated contacts, Industrial bulk packaging

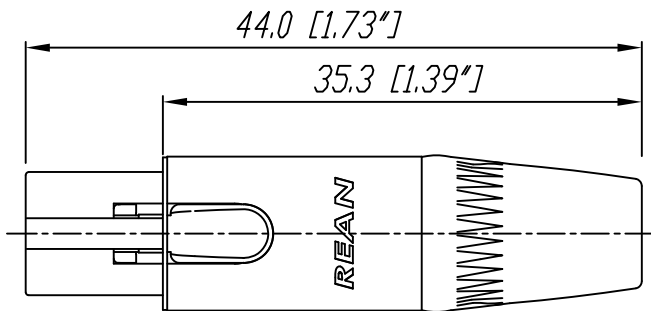

3 pole:



4 pole:



				*Lieferant darf ohne Ruecksprache nicht geaendert werden	Werkstoff:	Massstab:		Datum	Name
				Zeichnung urheberrechtlich geschuetzt (DIN 34) (C)		1:1		19.10.09	Battlogg
				Benennung:	TINY XLR RT*FC-B			Ersetzt durch:	Blatt
								Ersatz fuer:	von Blatt
					REAN			Zeichn. Nr.	3102 ST 22 112
Ind.	Aenderung	Datum	Name						