





## DS-2CD7153-E 2 MP Mini dome Network Camera

- Maximum Resolution up to 2 megapixel
- Output real time video at 720P Full HD
- H.264 video compression
- Progressive scan CMOS
- ePTZ
- POE
- Conforms to ONVIF and PSIA

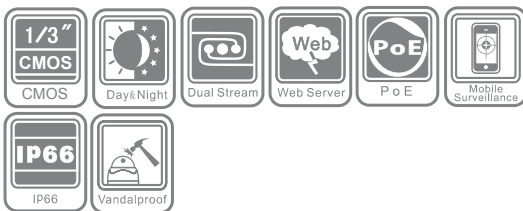

Unit: mm

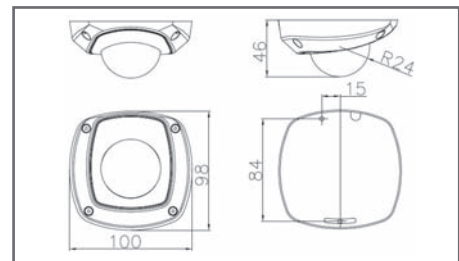

### Specifications

		DS-2CD7153-E
Camera	Image Sensor	1/3 " CMOS
	Effective Pixels	1600 (H) × 1200 (V)
	Min. Illumination	0.5 Lux @ F1.2; 0.1 Lux @ (F1.2. sense up x 5)
	Electronic Shutter	1/25s ~1/100,000s
	Day&Night	Electronic
	Lens	4 mm @ F1.8
	Angle of view	90°(4mm Lens)
Compression Standard	Video Parameter	Saturation/Brightness/Contrast adjustable through client software or web browser
	Video Compression	H.264/MJPEG
	Video Bit Rate	32 Kbps~16Mbps
Image	Max. Image Resolution	1600×1200
	Frame Rate	60HZ: 15fps (1600×1200), 30fps (1280×720),
Functions	e-PTZ	Yes
	Intelligent Alarm	Motion Detection
	Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, PPPoE, SMTP, NTP
	3-Axis adjustment	Yes
Interface	Communication Interface	1 RJ45 10M / 100M self-adaptive Ethernet port
	Power Supply	DC12V±10% / PoE
General	Power Consumption	4W MAX
	Working Temperature	-10°C~60°C(14°F~140°F)
	Working Humidity	90% or less
	Impact Protection	IEC60068-2-75Eh,50J;EN50102, up to IK10
	Weather Proof	IP66
	Dimension	99.9 x 97.5 x 46.5 mm (3.93" x 3.84" x 1.83")
	Weight	250g(0.55lbs)