


32CH PC BASE DVR

SU-32240/240

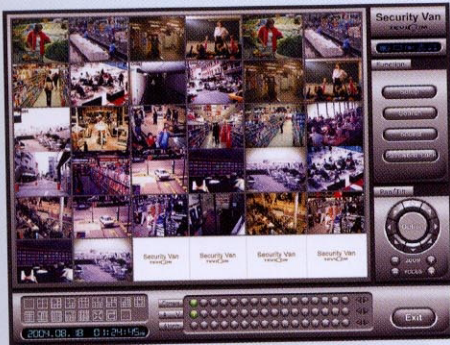

FEATURES

DISPLAY

Real Time Display Selectable
High Video Resolution Support
Indicators for Recording, Sensor Detection, Motion Detection, Alarm, HDD Capacity
Display Condition Adjustable : Brightness, Contrast, Saturation, Hue

RECORDING

Real Time Recording Selectable
Various Recording Options:
(Continuous, Schedule, Motion Detection, Event/Alarm)
Recording Frame, Resolution & Schedule Adjustable to Each Channel
Motion Detection Sensitivity Control
Pre & Post Event/Alarm Recording
Emergency Recording

SEARCH & DATA BACK-UP

Multi-Channel Search at the same time in Server and Remote
Instant Searching by Recording Time Bar, Date, and Camera
Various Search Functions: (Object Search, Panaramic Search, Event Search)
File Save in AVI, BMP, or JPEG

REMOTE FUNCTION

Dynamic IP Support
Monitoring, Multi-Channel Searching, and Full Control of Server from Remote PC
Multi-Access to Servers, Monitoring and Multi-Controlling by Management S/W Program
Web Client Supported by Built-in Web Server

OTHER FUNCTIONS

Automatic Smart Update Via Internet
PDA Support
PTZ Camera Control by RS422/485 or RS232 Including IRIS, Focus
Immediate Password Lock
6-Level User Access Protection
Various Event Alerts: (E-mail, Sound Beep, Screen Pop-up)
Watch-Dog Timer
Auto Shut Down 1minute after Power Failure
Water-marking Proof
Event Log
Multiple Language Support

SPECIFICATION


MODEL	SV-32240/240
Camera Input	32 CH
Display Speed	240fps(NTSC)/200fps(PAL)
Recording Speed	240fps(NTSC)/200fps(PAL)
Screen Division	1, 4, 6, 7, 9, 10, 13, 16, 22, 25, 30, 36 Splits
Monitor Output	RGB(VGA), RCA, BNC
Sensor Input	4
Alarm Output	4
Video Resolution	640×480, 320×240(NTSC)/720×576, 352×288(PAL)
Recording Quality	Control by 6 Level
Size of Image	2-4KB(320×240, Medium Level)
Video Compression	Mpeg4 and Mjpeg
Screen Switching	1-10 Seconds
Output Resolution	Over 400TVLines(1 Screen)
Playback Display	Multiple Camera Views on the Screen Simultaneously
Network	LAN, Cable Modem, PSTN, ISDN, ADSL
Alarm Output Time	1-30 Seconds
Motion Detection	5 Types of Sensors
Power Tolerance	Supported
Auto Detection	Supported
Data Back-up	FDD, DVD-RW, CD-RW, Network Driver
HDD	Standard 80GB/Maximum 1,250GB Expandable
Audio Input	4 Channels
Audio Compression	Tevicom Unique Compression Algorithm
Remote Control	RS422/485 or 232(Pan/Tilt/Zoom/IRIS)
Operating Temperature	0℃ to 50℃
System Dimension	480×175×450mm(W×H×D)
Weight	21Kg

DIMENSION

FRONT VIEW



REAR VIEW



SIDE VIEW

