



3GPP/ISMA Network Camera

The VIVOTEK IP7135/IP7137 is a 3GPP/ISMA-compatible network camera, offering superior image quality and efficient bandwidth by MPEG-4 implementation. Users can easily access it and receive synchronized video and audio by computers, cellphones, or media adapters with TV, anytime, anywhere for indoor surveillance and remote monitoring.



IP7135 / IP7137

Features


- Live Video and Audio Monitoring via 2.5G/3G Mobile Phone or Media Adapter
- MPEG-4 Video Compression (Simple Profile)
- Compact Size with Stylish Design
- Easy to Install and Configure
- Optimized Synchronization of Audio and Video
- 802.11g Wireless Connection (IP7137)
- Supports 3GPP/ISMA RTSP (Real Time Streaming Protocol)
- Intelligent Motion Detection
- Superior Low Light Performance
- Excellent Image Quality with Up to 30 Frames Per Second in Full VGA Resolution

3GPP/ISMA Network Camera

IP7135 / IP7137



- Cellphone with 3GPP player
- ISMA compliant devices
- Real Player 10.5
- Quick Time 6.5
- Packet Video Player 3.3

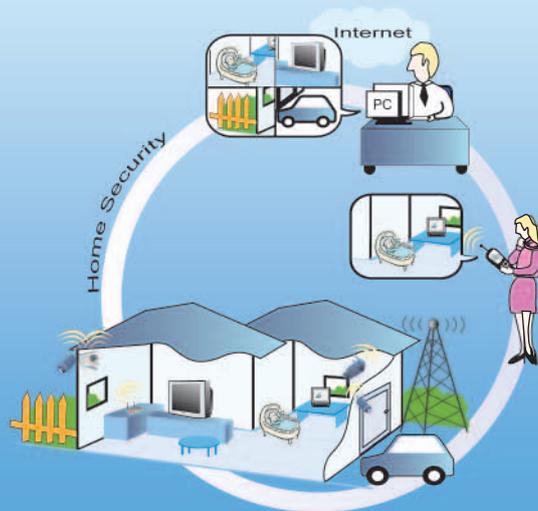

Technical Specifications

Models	<ul style="list-style-type: none"> · IP7135 (CMOS) · IP7137 (CMOS, wireless) 	Audio	<ul style="list-style-type: none"> · Algorithm GSM-AMR/MPEG4 AAC · Supports audio mute
System	<ul style="list-style-type: none"> · CPU: VTK-1000 SoC · RAM: 32MB SDRAM · ROM: 4MB FLASH ROM 	Microphone	<ul style="list-style-type: none"> · Omni-directional · Frequency 50~16000Hz · S/N ratio More than 60dB
Networking	<ul style="list-style-type: none"> · Protocols UPnP, TCP/IP, RTSP/RTP/RTCP, HTTP, SMTP, FTP, Telnet, NTP, DNS, DDNS, DHCP and PPPoE · Ethernet 10 baseT or 100 baseT Fast Ethernet auto negotiation · Wireless (IP7137) 802.11g wireless LAN 	Security	<ul style="list-style-type: none"> · ID/Password authentication
Video	<ul style="list-style-type: none"> · Algorithm MPEG4 simple profile for streaming video JPEG for still image · Features Adjustable image size, quality and bit-rate Time stamp and text caption Three configurable motion detection windows Flip & mirror · Resolution Up to 30/25 frames at 160x120 Up to 30/25 frames at 176x144 Up to 30/25 frames at 320x240 Up to 30/25 frames at 640x480 	LED Indicator	<ul style="list-style-type: none"> · Two color system status indicators
Camera Specifications	<ul style="list-style-type: none"> · 1/4" color CMOS sensor · Resolution: 640(H)x480(V) · 1.0Lux/F2.0 · AGC/AWB/AES · Electronic Shutter: 1/60 to 1/15,000 sec. 	Dimensions	<ul style="list-style-type: none"> · Depth: 34.8mm · Width: 109.5mm · Height: 77.2mm
Lens	<ul style="list-style-type: none"> · 4.0mm, F2.0 	Weight	<ul style="list-style-type: none"> · Net: 150g (IP7135) · Net: 165g (IP7137)
		Power	<ul style="list-style-type: none"> · 5VDC
		Operating Environments	<ul style="list-style-type: none"> · Temperature: 0~50°C (32~122°F) · Humidity: 85% RH
		EMI & Safety	<ul style="list-style-type: none"> · CE, FCC
		Viewing System Requirements	<ul style="list-style-type: none"> · Operating system: Microsoft Windows 98 SE, ME, 2000, XP · Browser: Internet Explorer 5.0 or above · Cellphone: 3GPP player · Real Player 10.5 · Quick Time 6.5 · Packet Video Player 3.0

All specifications are subject to change without notice.
All other trademarks are owned by their respective companies.



6F, No.192, Lien-Cheng Rd., Chung-Ho, Taipei County, Taiwan
Tel: +886 2 82455282
Fax: +886 2 82455532
E-mail: sales@vivotek.com
Http://www.vivotek.com